

*Concorso pubblico, per esami, per la copertura di n. 2 posti afferenti all'area dei Funzionari, settore tecnico-informatico, con rapporto di lavoro subordinato a tempo indeterminato, con regime di impegno a tempo pieno, profilo Esperto informatico – Sistemista e Network Manager per le esigenze del Centro Servizi Informatici dell'Università degli Studi di Bari Aldo Moro, indetto con DDG n. 1862 del giorno 29/11/2024*

Domande elaborate dalla commissione esaminatrice per l'espletamento della prova orale.

### **DOMANDE BUSTA N. 1**

- Cos'è un dominio Active Directory e quali funzionalità offre;
- Protocolli in uso per i servizi di posta elettronica: differenze tra il protocollo POP3 e IMAP;
- Il Consiglio di amministrazione;
- Traduzione brano:

Availability is one of the most important requirements for modern computing systems. In cloud computing, it is common to use it as a key factor in adopting a cloud service. This paper studies the breakdown in calculating the availability and proposes a conceptual model as middleware in order to speed up the time for detection during a system crash. It defines the maximum acceptable outage time for any given period. Through simulations tests, we verified that the proposed model is able to detect the system crash in sub-seconds and improve the overall availability of the system compared to currently used industry solutions.

### **DOMANDE BUSTA N. 2**

- Partizionamento all'interno di un sistema Linux: ridimensionamento e strumenti di gestione;
- I virtualhost in un webserver: descrizione e tipologie;
- Il Senato Accademico;
- Traduzione brano:

Remote working and e-commerce have become the new normal since the pandemic [1, 2]. They have changed our daily lives and the way how we consume services. With the growth of these online services, there is a high demand for non-functional requirements, especially in the domain of Availability and Fault Tolerance.

### **DOMANDE BUSTA N. 3**

- Indirizzamento IP pubblico e privato su Internet;
- Il servizio DNS: i record MX e i CNAME;
- Il Rettore;
- Traduzione brano:

Availability [3] is considered one of the main challenges of modern IT, especially for cloud computing, since it can provide dynamic elasticity on computing resources and growing data transfer needs [4, 5]. Therefore, as more missing critical applications are shifting towards this architectural pattern, availability has been considered one of the major concerns.

### **DOMANDE BUSTA N. 4**

- Gli standard 802.11 delle reti wireless: differenze, bande e velocità;

- Permessi di accesso ai file sui filesystem Linux;
- Il Direttore Generale;
- Traduzione brano:

High Availability defines the maximum allowed outage time, which usually refers to "5-nines" of up-time, i.e. less than 6 minutes of downtime annually [6]. On the other hand, we have Fault Tolerance. It means that the system will operate continuously even if some of the components fail. Instead of failing completely, applications are designed to operate at downgraded service, while system recovery will take place and try to resume the service automatically.

#### **DOMANDE BUSTA N. 5**

- Il servizio FTP: utilizzo e modalità di connessione;
- Switch di accesso, distribuzione e core: esempi di utilizzo in una rete;
- Il Collegio dei revisori dei conti;
- Traduzione brano:

The main contributions of this paper are as follows. We will first examine the current service availability and fault tolerance in cloud providers' practices, together with other proposed solutions in other research papers and industry best practices. Finally, we propose an improved system design that aims to enhance service availability and fault tolerance with a sample implementation using cloud services.

#### **DOMANDE BUSTA N. 6**

- Tipologie di hypervisor: esempi e caratteristiche;
- Servizi di rete di base necessari in una infrastruttura;
- Il Nucleo di valutazione;
- Traduzione brano:

This term has been extensively used by service providers, especially cloud service providers [9]. If any hiccups cannot fulfill this commitment, service providers will issue credit for compensation [10]. Therefore, much research has been dedicated to guaranteeing availability in the cloud.

#### **DOMANDE BUSTA N. 7**

- Il servizio DHCP in una infrastruttura di rete;
- Illustrare il concetto di mounting nel filesystem linux;
- Il Dipartimento;
- Traduzione brano:

In the cloud computing domain, [12] has proposed the cloud availability taxonomy using three criteria: availability mechanisms, failures protected against, and metrics, which categorized all the redundancy models accordingly Availability Management Framework [13]. We define "High Availability" as a service that is available at least 99.999% of the time [7]. For example, the maximum downtime under this scenario for service annually is only 5 minutes and 15 seconds.

#### **DOMANDE BUSTA N. 8**

- Access Control List in un firewall: uso ed esempi;
- Container e macchine virtuali: esempi e differenze;
- Le Scuole;
- Traduzione brano:

In 2010, [14] proposed a middleware "Low Latency Fault Tolerance" that uses different membership, messaging, and synchronization protocols to achieve fault tolerance at the application level. This middleware provides fault tolerance for distributed applications using the leader/follower replication approach. In 2011, [12] proposed a "heartbeat" approach to detect application failures. When no heartbeat is received within a grace period, it is assumed that the application has failed, and we will trigger fail-over/recovery action.

### **DOMANDE BUSTA N. 9**

- Il concetto di alta disponibilità (HA) in un sistema Hypervisor;
- Risoluzione diretta e inversa in un servizio DNS: zone, seriali e record;
- I titoli di studio rilasciati dall'Università;
- Traduzione brano:

This MTBF is not only used in Computer Science but is also widely used as an important maintenance metric to measure performance, safety, and equipment design for mission-critical systems [16]. Another point to note is that MTBF only considers unplanned maintenance time, while planned maintenance events like scheduled software updates are not included.

### **DOMANDE BUSTA N. 10**

- Operazioni pianificate e crontab nei sistemi Windows e Linux;
- La sicurezza nelle reti Wireless;
- Il Master Universitario;
- Traduzione brano:

Maximize the MTBF: There are several ways to increase the MTBF. For example, keeping track of the MTBF for each sub-system, especially those long-run operation processes. Perform machine learning/data mining techniques to identify any usage pattern leading to system failure, then arrange corresponding fixes during planned maintenance. While this can improve the MTBF and result in better availability, this paper will focus on minimizing the denominator, i.e., reducing MTTF to improve the overall availability.

### **DOMANDE BUSTA N. 11**

- La resilienza su un sistema di directory in ambienti Windows o Linux;
- Container e docker: mappatura delle risorse di sistema;
- Il Presidio di Qualità;
- Traduzione brano:

Minimize Time to Detect (MTD): By Murphy's Law: "Anything that can go wrong will go wrong". While we could not completely eliminate the chances for system failures, we should try to minimize the time to detect the error so that we can discover the problem earlier to shorten the outage time. Then the overall availability will be increased.

### **DOMANDE BUSTA N. 12**

- Protezione delle risorse di una LAN: utilizzo di Virtual Private Network;
- Accesso ai sistemi Windows e Linux da remoto;
- Il Direttore di Dipartimento;
- Traduzione brano:

Minimize Mean Time to Fix (MTF): By standardizing the procedure to restart/repair or replace the faulty component, we can reduce the time to fix the problem. On the other hand, by reserving additional spare components as redundancy, the time to repair can be minimal, providing that

the failure cause is not due to logical fault. In this paper, the application we implemented will use Docker and Publish/Subscribe mechanism to speed up the recovery:

### **DOMANDE BUSTA N. 13**

- Utilizzo di HTTPS in un webserver: certificati e chiavi private;
- Protezioni di sistema in ambiente Linux: selinux e permessi;
- La governance dell'Università;
- Traduzione brano:

As discussed in the previous section, we will focus on minimizing the "Time to Detect" and "Time to Fix". The industry practice is to use pull-based health checks, i.e. load balancer that keeps sending probe requests to each worker node every interval (th). In case the worker node is unavailable immediately after the last health check.

### **DOMANDE BUSTA N. 14**

- Criteri di gruppo in active directory: esempi d'uso;
- Utilizzo delle Vlan in una rete;
- Finalità istituzionali dell'Università;
- Traduzione brano:

B. Load Agent This is a standalone agent running independently from the service application. This daemon starts a socket and waits for connections from Resource Agent. Then it will keep a persistent session which expects to receive a "Status Update" from Resource Agent. Then, it will update the status of the Resource Agent into a distributed cache such that the Load Balancer will use this information for client request dispatching.

Si rende disponibile il documento dal quale sono stati tratti i brani di inglese.

Il Segretario della Commissione  
Sig. Fabio CORPOSANTO

# Study on High Availability and Fault Tolerance

Norman Kong Koon Kit

*Khoury College of Computer Sciences  
Northeastern University, Vancouver, BC, Canada  
kong.ko@northeastern.edu*

Michal Aibin

*Khoury College of Computer Sciences  
Northeastern University, Vancouver, BC, Canada  
m.aibin@northeastern.edu*

**Abstract**—Availability is one of the most important requirements for modern computing systems. In cloud computing, it is common to use it as a key factor in adopting a cloud service. This paper studies the breakdown in calculating the availability and proposes a conceptual model as middleware in order to speed up the time for detection during a system crash. It defines the maximum acceptable outage time for any given period. Through simulations tests, we verified that the proposed model is able to detect the system crash in sub-seconds and improve the overall availability of the system compared to currently used industry solutions.

**Index Terms**—availability, cloud computing, docker

## I. INTRODUCTION

Remote working and e-commerce have become the new normal since the pandemic [1, 2]. They have changed our daily lives and the way how we consume services. With the growth of these online services, there is a high demand for non-functional requirements, especially in the domain of Availability and Fault Tolerance.

Availability [3] is considered one of the main challenges of modern IT, especially for cloud computing, since it can provide dynamic elasticity on computing resources and growing data transfer needs [4, 5]. Therefore, as more missing critical applications are shifting towards this architectural pattern, availability has been considered one of the major concerns.

High Availability defines the maximum allowed outage time, which usually refers to "5-nines" of up-time, i.e. less than 6 minutes of downtime annually [6]. On the other hand, we have Fault Tolerance. It means that the system will operate continuously even if some of the components fail. Instead of failing completely, applications are designed to operate at downgraded service, while system recovery will take place and try to resume the service automatically.

The main contributions of this paper are as follows. We will first examine the current service availability and fault tolerance in cloud providers' practices, together with other proposed solutions in other research papers and industry best practices. Finally, we propose an improved system design that aims to enhance service availability and fault tolerance with a sample implementation using cloud services.

The organization of this paper is as follows. Section 2 will discuss the related works with various definitions of availability and fault tolerance used. We will then introduce the current challenges in Section 3. In Section 4, we will propose and implement our novel solution using a sample application. Evaluation and performance assessment is conducted in Section 5, followed by a summary and conclusions.

## II. RELATED WORKS

Understanding what availability is a prerequisite for the evaluation. The term "Availability" was defined as "the degree to which a system is functioning and is accessible to deliver its services during a given time interval" [7]. This is the percentage of time that allows outage time for a given period. Some researchers further defined availability in the form of Service Level Agreements [8], and considered availability as the "probability of providing service according to defined requirements".

This term has been extensively used by service providers, especially cloud service providers [9]. If any hiccups cannot fulfill this commitment, service providers will issue credit for compensation [10]. Therefore, much research has been dedicated to guaranteeing availability in the cloud [11].

In the cloud computing domain, [12] has proposed the cloud availability taxonomy using three criteria: availability mechanisms, failures protected against, and metrics, which categorized all the redundancy models accordingly Availability Management Framework [13]. We define "High Availability" as a service that is available at least 99.999% of the time [7]. For example, the maximum downtime under this scenario for service annually is only 5 minutes and 15 seconds.

In 2010, [14] proposed a middleware "Low Latency Fault Tolerance" that uses different membership, messaging, and synchronization protocols to achieve fault tolerance at the application level. This middleware provides fault tolerance for distributed applications using the leader/follower replication approach. In 2011, [12] proposed a "heartbeat" approach to detect application failures. When no heartbeat is received within a grace period, it is assumed that the application has failed, and we will trigger fail-over/recovery action. For instance, the AWS load balancer monitors [15] the application status in such a way, but they do not protect against application failures. Although this mechanism does not detect all possible application failures, it is the most generic way, as the application team is only required to provide an HTTP endpoint. However, this heartbeat technique is not an effective solution since it is a passive pull-based mechanism that takes more than 10 seconds to detect the failure. Finally, with the rise of microservice architecture, some researchers have begun to use Docker / Kubernetes to achieve better availability by shortening the reaction time to detect fault events [14].

As mentioned before, we will explore all the available mechanisms in this paper and propose our novel solution that

allows for the higher availability of cloud resources.

### III. PROBLEM STATEMENT

In layman's definition, the availability can be expressed by a mathematical equation :

$$Availability = \frac{uptime}{uptime + downtime} * 100\%$$

The higher number will have better availability, which provides better service level agreement.

To further understand the problem, we can further define Reliability as the probability that a system continues to work as expected over a specified time duration. Thus, the terminology MTBF (Mean Time Between Failures) is used to represent the average time to the next failure, and is calculated as:

$$MTBF = \frac{Service\ Running\ Duration}{Number\ of\ Incidents}$$

This MTBF is not only used in Computer Science but is also widely used as an important maintenance metric to measure performance, safety, and equipment design for mission-critical systems [16]. Another point to note is that MTBF only considers unplanned maintenance time, while planned maintenance events like scheduled software updates are not included.

Another term related to availability is MTTR (Mean Time To Recovery) which is the total duration starting from system malfunction, system detection and system recovery, which is denoted as

$$MTTR = \frac{Mean\ Time\ to\ Recovery}{Number\ of\ Incidents}$$

Based on MTBF and MTTR definitions, we can use the availability of a system to measure the impact of failures on an application, and the availability can be defined as:

$$Availability = \frac{MTBF}{MTBF + MTTR} * 100\%$$

where we can further break down MTTR as:

$$MTTR = MTD + MTF$$

where:

- MTD = Mean Time to Detect
- MTF = Mean Time to Fix

Hence, we can express availability as a function of:

$$Availability = \frac{MTBF}{MTBF + MTD + MTF} * 100\%$$

The relation between all of those above is presented in Figure below.

Therefore, using the formula above, we can improve the Availability by either increasing the Service Up-time (maximize MTBF) or decreasing the Mean Time to Detect (minimize MTD) or decreasing the Mean Time to Fix (minimize MTF), which we will discuss in the subsection below.

#### A. Optimization problem

The primary objective is to maximize the availability of a system to achieve higher Service Level Agreements (which means more ninth). Thus, we can either perform:

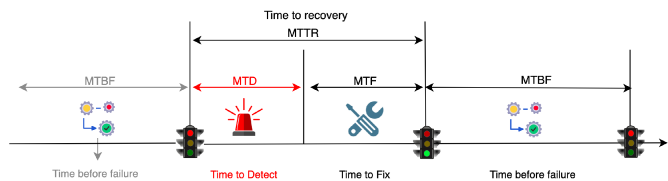


Fig. 1. Illustration on the relationship between various status

1) *Maximize the MTBF*: There are several ways to increase the MTBF. For example, keeping track of the MTBF for each sub-system, especially those long-run operation processes. Perform machine learning/data mining techniques to identify any usage pattern leading to system failure, then arrange corresponding fixes during planned maintenance. While this can improve the MTBF and result in better availability, this paper will focus on minimizing the denominator, i.e., reducing MTTR to improve the overall availability.

2) *Minimize Time to Detect (MTD)*: By Murphy's Law: "Anything that can go wrong will go wrong". While we could not completely eliminate the chances for system failures, we should try to minimize the time to detect the error so that we can discover the problem earlier to shorten the outage time. Then the overall availability will be increased.

3) *Minimize Mean Time to Fix (MTF)*: By standardizing the procedure to restart/repair or replace the faulty component, we can reduce the time to fix the problem. On the other hand, by reserving additional spare components as redundancy, the time to repair can be minimal, providing that the failure cause is not due to logical fault. In this paper, the application we implemented will use Docker and Publish/Subscribe mechanism to speed up the recovery.

### IV. THE ALGORITHM

As discussed in the previous section, we will focus on minimizing the "Time to Detect" and "Time to Fix". The industry practice is to use pull-based health checks, i.e. load balancer that keeps sending probe requests to each worker node every interval ( $t_h$ ). In case the worker node is unavailable immediately after the last health check, then the particular worker node will become unavailable until the load balancer detects it in the next health check  $2t_h$ . To make things even worse, the system will send additional retry health checks, which means that the outage time can be up to  $3t_h$ . Therefore, in this section, we propose a push-based health-check mechanism such that the system can detect node availability as earlier as possible.

Before we describe the algorithm, we introduce its components in Figure 2.

#### A. Resource Agent

This is an embedded agent running on the worker load. When the worker node startup, it will register an "Alive" signal to the Load Agent. Once connected, it repeatedly sends a "Status Update" event which includes the

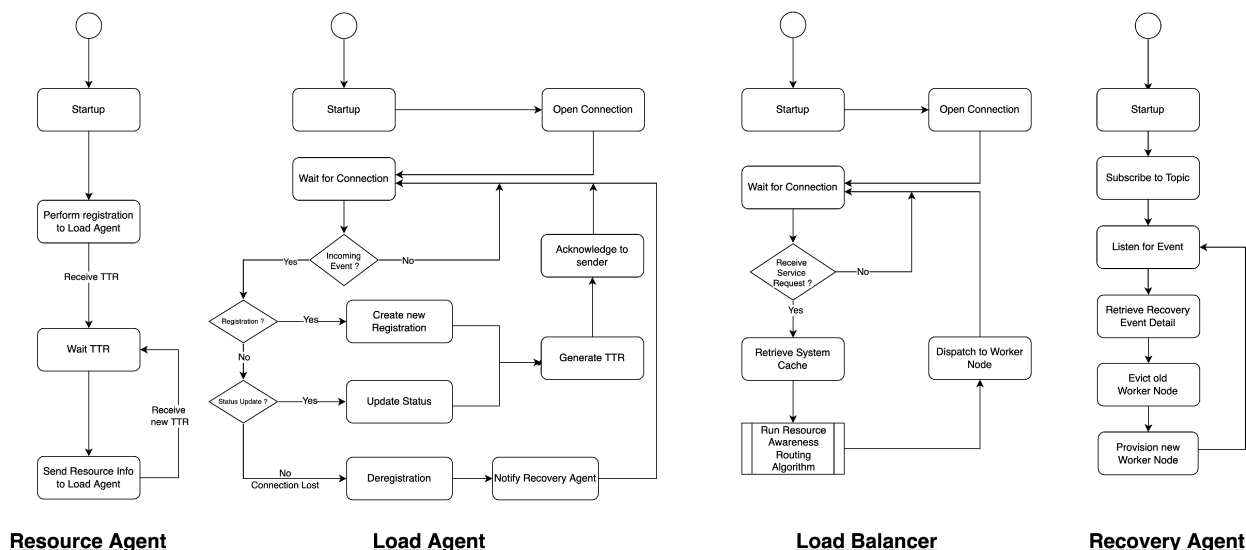


Fig. 2. High-level overview for each individual component

CPU/Memory/Storage/Active thread count to the Load Agent and expects to receive an acknowledgement with "Time To Repost" (TTR). Then the agent will wait for this TTR and send the updated resource information again.

### B. Load Agent

This is a standalone agent running independently from the service application. This daemon starts a socket and waits for connections from Resource Agent. Then it will keep a persistent session which expects to receive a "Status Update" from Resource Agent. Then, it will update the status of the Resource Agent into a distributed cache such that the Load Balancer will use this information for client request dispatching. Since the connection is a socket connection, in case the connection is lost, this persistent connection will be terminated and the Load Agent will be notified immediately, then it will detach this worker node from the cache, such that the Load Balancer will not dispatch the client request to this crashed node accordingly. In order to enhance the fast recovery, this agent will also publish a recovery message such that Recovery Agent will perform recovery action accordingly.

### C. Load Balancer

This is the client-facing endpoint that accepts external requests. Then we implement a Resource Awareness routing algorithm to select a worker node, then dispatch the request to this node to handle. We will report an outage if no node is available and advise the client to retry later.

### D. Recovery Agent

This standalone agent works like Kubernetes master node to perform worker node life cycle management, including node creation and eviction. This agent subscribes to the topic that Load Agent will publish recovery requests in case we crash any worker node.

### E. Resource Aware Routing Algorithm

Our approach is a greedy algorithm that will select nodes that match several criteria. We named it Resource Aware Routing Algorithm (RARA). The highest priority will be finding a worker node that has available resources that are "Just Fit", which means after servicing this new request, this node will be saturated. The rationale is that we would like to reduce resource fragmentation across different worker nodes. In case we can fill up the capacity for one particular node, then we can keep other resourceful nodes for future demanding requests. In the meanwhile, we proposed a thread level checking to ensure that the number of concurrent thread cannot be greater than the average, such that no worker node will be too heavily overloaded while some node is deep underloaded. However, this is subject to the programming language and the system's capability. The pseudocode is available in Figure 3. Furthermore, the entire flow of the system is shown in Figure 4 - when Worker Node A disconnects, Load Agent will receive a "Session Disconnection" signal, then it will immediately update the system cache, so the subsequent client request will not route to this faulty node accordingly. In the meanwhile, the Load Agent will also trigger a "Recovery" message to Recovery Agent to perform the worker node eviction and re-provision.

The proposed methodology considerably enhances Availability since it uses a persistent connection with push-based health checks. In the traditional pull-based health check by Load Balancer, each probe requires a new TCP connection such that it will spend extra time on TCP handshaking. By using the persistent connection, the Load Agent will receive a "Session Disconnect" signal immediately when any worker node crashes. Therefore, the "Time to Detect" is expected to be much shorter than the pull-based mechanism. However, the drawback is persistent push-based mechanism will consume

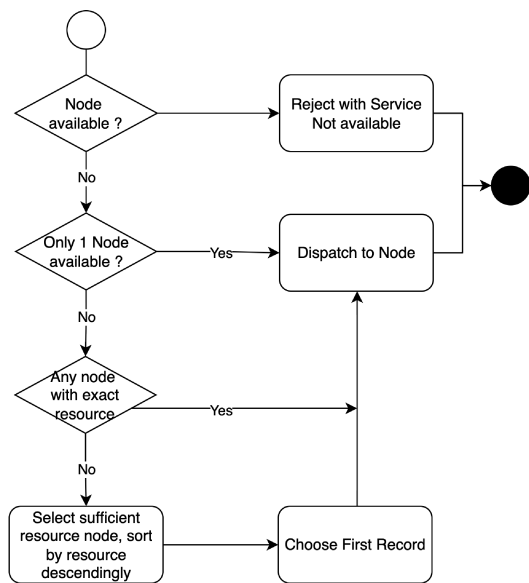


Fig. 3. Resource awareness routing algorithm (RARA)

much more system resources than the pull-based one, so this methodology should be used on mission-critical or computing/networking resources in abundance applications.

In the next section, we will discuss our sample application that uses this stack and compare it with the Amazon Application Load Balancer accordingly.

## V. SIMULATION PLAN

The proposed architecture was constructed, as shown in Figure 5, and we compared it with the standard, out-of-box Amazon Load Balancer.

For evaluation purposes, we have implemented the entire application using Nodejs. Socket.io was chosen as the persistent connection middleware between Resource Agent and Load agent. Redis was adopted as the cached layer and also Redis pub/sub was adopted for the communication between Load Agent and Recovery Agent.

In order to demonstrate the Resource Agent middleware, various workload applications that embedded this agent were built and further dockerized as a Docker image, such that the Recovery Agent can perform recovery by using the docker command. Since we are trying to measure the performance of fault detection, we embedded a “Kill Switch” that will trigger the application to “crash” after providing service for a particular time.

Finally, the ELK stack was selected as the log management layer such that we can capture all the status log centrally.

In this paper, we analyze the performance of the existing cloud provider fault-detection method and the proposed fault-detection method via experiments. Subsequently, we compared how the performance varies depending on the change in workload and resource usage. We set up 10 threads to run 1,000,000 iterations per scenario.

We will perform the simulation using a different workload against the kill switch frequency.

## VI. ANALYSIS

### A. Mean Time To Detect

We calculated that the average time to detect a system crash is around 24.5 milliseconds. The data is consistent across lightweight web service tasks and I/O-bound tasks. The reason is that these jobs did not affect our proposed algorithm since the Kill-Switch mechanism runs independently in the NodeJS event loop. However, the CPU-bound jobs were greatly affected since NodeJS is a single-thread programming model, meaning we can execute only one task simultaneously. Our implementation tried to compute the Fibonacci series so the JavaScript engine would execute the computation solely, so our resource agent plugin was “paused” during execution. Therefore, we have dropped out the CPU-bound jobs testing after several trials runs.

Compared with the AWS application load balancer, the “time to detect” is 14 seconds. This figure is calculated based on the minimum of the AWS Target Group Health Check setting. The minimum unhealthy threshold is 2, while each health check interval takes 5 seconds with 2 seconds timeout. As illustrated in Figure 6, the worst case mean time to detect is  $(5+2) * 2 = 14$  seconds. Therefore, our proposed approach (24.5 ms) is 570 times faster.

### B. Overall Service Level Agreement

Instead of focusing on the Mean time to detect, we focused on the effectiveness of the overall service level agreement.

TABLE I  
DETAIL BREAKDOWN OF THE SIMULATION

#	Duration(s)	Up(s)	Down(s)	SLA(%)	Fail Count
AWS kill-switch 5	2,105.901	2,020.234	85.667	95.93204%	2,080
AWS kill-switch 10	2,203.670	2,131.404	72.266	96.72067%	1,518
AWS kill-switch 20	2,089.374	2,048.838	40.536	98.05992%	1,021
RARA kill-switch 5	2,943.944	2,936.602	7.343	99.75058%	3,990
RARA kill-switch 10	2,970.906	2,970.883	0.023	99.99923%	600
RARA kill-switch 20	3,005.539	3,004.165	1.374	99.95429%	308

In our proposed solution, as we run in a local environment, we created 10 threads that triggered 100,000 requests individually, so the total execution is 1 million requests for each kill switch iteration. The total execution time for each iteration is around 50 minutes.

We observed the number of fail counts was 3,990 when the kill-switch was 5 minutes. Although this fail count is the highest among all scenarios, the downtime was only 7.343s, so the overall SLA was 99.750%. When the kill switches increased to 10 minutes, the downtime became 0.023s, so the overall availability was 99.999% (five-ninth). This indicates

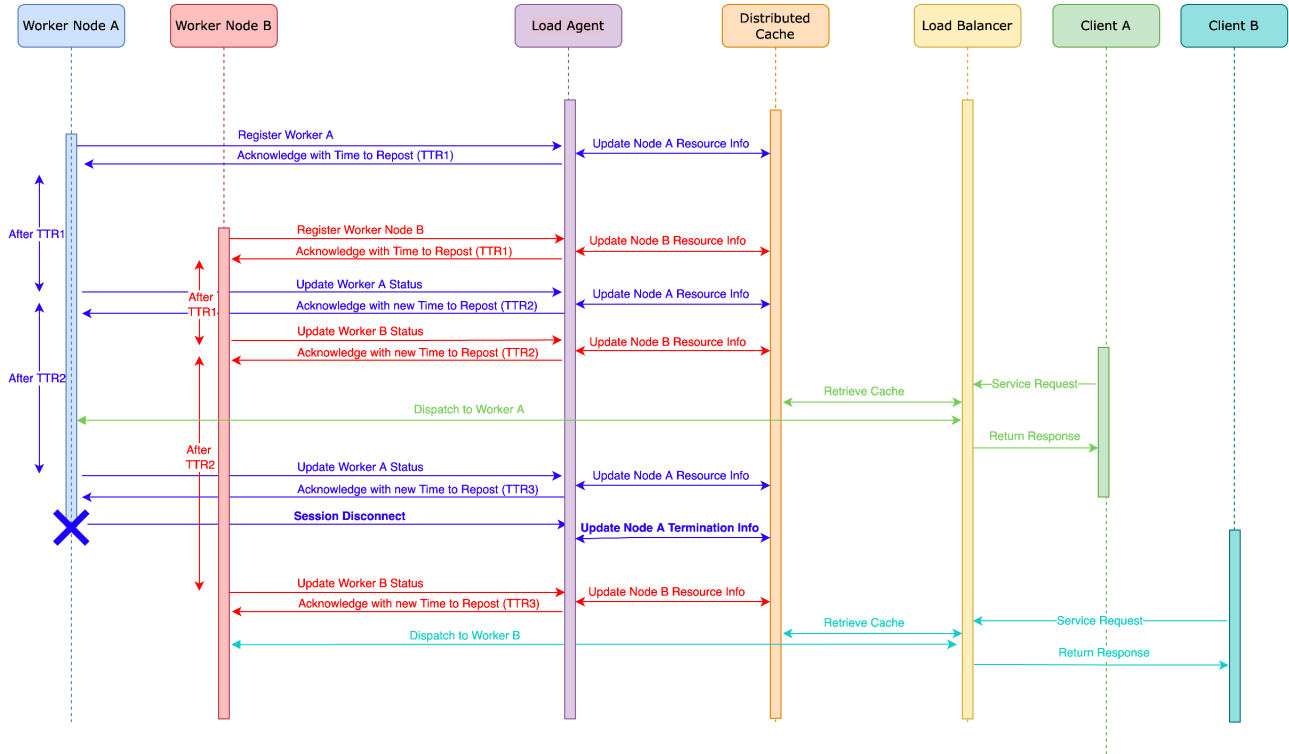


Fig. 4. Overall flow diagram to illustrate the fault event handling, recovery agent is not in scope

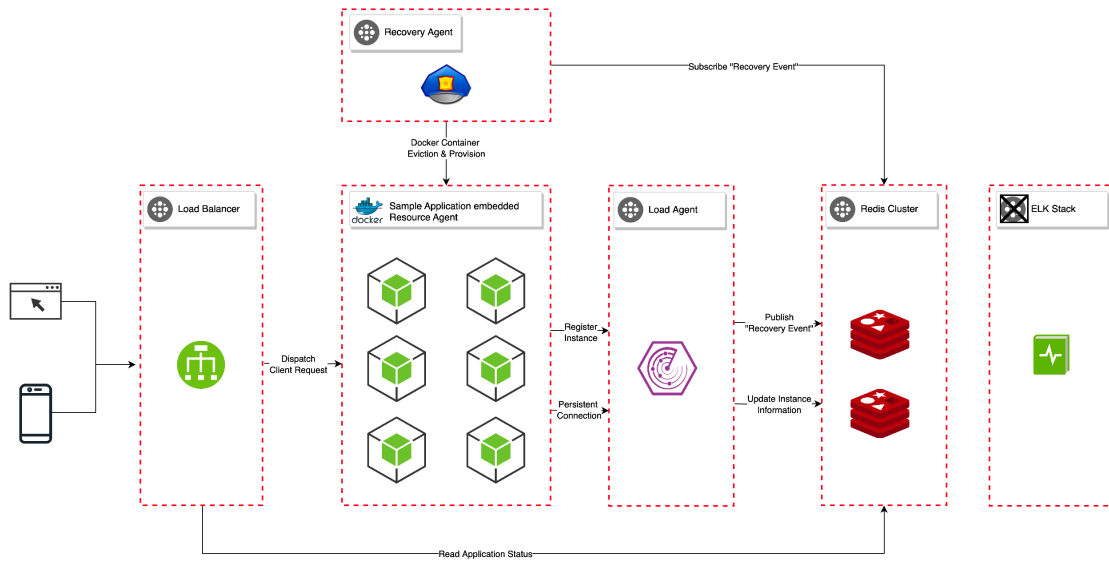


Fig. 5. Evaluation Implementation

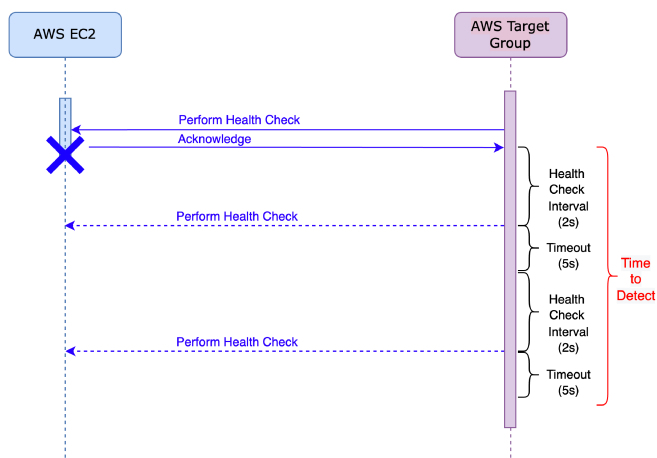


Fig. 6. AWS Load Balancer Worst Case scenario

that we can achieve "High Availability" even if our applications are scheduled to crash every 10 minutes. When the kill switch increased to 20 minutes, the SLA slightly dropped to 99.954%. All proposed scenarios have outperformed the AWS Application Load Balancer approach, as shown in Table I.

In contrast, we have set up the AWS Application Load Balancer with the fastest fault recovery. Since the stress test is running on a remote environment, we created 10 threads that only triggered 10,000 requests individually, so the total execution was 100,000 requests. The total execution time for each iteration was around 35 minutes. As expected, we observed that the downtime decreased while the kill switch increased. The SLA was initially 95.93% when the kill switch was 5 minutes, then kept increasing to 96.72% and finally reached 98.06% when the kill switch was 20 minutes. The number of failed requests decreased by half from 2080 to 1021 during the 100,000 iterations.

## VII. CONCLUSION

High availability has been one of the biggest challenges in application design. We can use various techniques to improve the availability of a service depending on different use cases. This research paper proposes to use a push-based mechanism with a persistent connection to reduce the "Mean Time to Detect" so that we can improve the overall Service Level Agreement.

## ACKNOWLEDGMENT

The authors would like to express great appreciation to Peter Smith for his valuable and constructive suggestions during the planning and development of this research work. His willingness to give his time so generously has been very much appreciated.

## REFERENCES

- [1] *E-commerce in the time of COVID-19*. en. URL: <https://www.oecd.org/coronavirus/policy-responses/e-commerce-in-the-time-of-covid-19-3a2b78e8/> (visited on 08/15/2022).
- [2] *The Remote Work Report by GitLab: The Future of Work is Remote*. en. URL: <https://about.gitlab.com/company/culture/all-remote/remote-work-report/> (visited on 08/15/2022).
- [3] Astrid Undheim, Ameen Chilwan, and Poul Heegaard. "Differentiated availability in cloud computing SLAs". In: *2011 IEEE/ACM 12th International Conference on Grid Computing*. IEEE. 2011, pp. 129–136.
- [4] Michal Aibin and Krzysztof Walkowiak. "Resource requirements in fixed-grid and flex-grid networks for dynamic provisioning of data center traffic". In: *2016 IEEE Canadian Conference on Electrical and Computer Engineering (CCECE)*. IEEE. 2016, pp. 1–4.
- [5] Michal Aibin. "Traffic prediction based on machine learning for elastic optical networks". In: *Optical Switching and Networking 30* (2018), pp. 33–39.
- [6] *AWS Application Migration Service (MGN) Service Level Agreement*. en-US. URL: <https://aws.amazon.com/application-migration-service/sla/> (visited on 08/15/2022).
- [7] Mina Nabi, Maria Toeroe, and Ferhat Khendek. "Availability in the cloud: State of the art". In: *Journal of Network and Computer Applications 60* (2016), pp. 54–67.
- [8] D Davide Lamanna, James Skene, and Wolfgang Emmerich. "Slang: A language for defining service level agreements". In: *Ninth IEEE Workshop on Future Trends of Distributed Computing Systems, Proceedings*. IEEE Computer Soc. 2003, pp. 100–106.
- [9] *Google Cloud Platform Service Level Agreements*. en. URL: <https://cloud.google.com/terms/sla> (visited on 08/15/2022).
- [10] *Amazon Compute Service Level Agreement*. en-US. URL: <https://aws.amazon.com/compute/sla/> (visited on 08/15/2022).
- [11] Alan Robertson. "{Linux-HA} Heartbeat System Design". In: *4th Annual Linux Showcase & Conference (ALS 2000)*. 2000.
- [12] Hyunsik Yang and Younghan Kim. "Design and implementation of fast fault detection in cloud infrastructure for containerized IoT services". In: *Sensors 20.16* (2020), p. 4592.
- [13] Pejman Salehi. "A model based framework for service availability management". PhD thesis. Concordia University, 2012.
- [14] Wenbing Zhao, PM Melliar-Smith, and Louise E Moser. "Fault tolerance middleware for cloud computing". In: *2010 IEEE 3rd International Conference on Cloud Computing*. IEEE. 2010, pp. 67–74.
- [15] Jinesh Varia, Sajee Mathew, et al. "Overview of amazon web services". In: *Amazon Web Services 105* (2014).
- [16] Duane Pettit, Andrew Turnbull, and Henk A Roelant. *General aviation aircraft reliability study*. Tech. rep. 2001.